



Motorized feed carts

Specially designed to facilitate
feed distribution.



Motorized feed cart

Supercart

The Supercart is a motorized feeder cart specially designed to facilitate feed distribution of silage or TMR!

All the components of the motorized feeder cart have been designed to give you the best performance!

Features

Honda motor

Adjustable deflector

Auger trough lined with UHMW polymer

Protective guard

Choice of steering tires
(pneumatic/anti-puncture)

Direct drive by 2 wheel motors

Parking brakes

Benefits

- ✓ Abrasion-resistant UHMW trough protector.
- ✓ High performance steering system.
- ✓ Engine base has a vibration dampener to enhance drivability.
- ✓ High-performance hydrostatic pump.
- ✓ Easy access refuelling cap.

**Highly durable for
minimum maintenance!**

Options


- // Removable trough
- // Weighing system
- // Driver seat
- // Flat-free steering tires
- // Tractor type traction tires
- // TMR beaters (models 530 and 542)






Redesigned beaters

The powerful beaters have been completely redesigned for maximum performance in the coarsest silages and TMRs. Available as an option on the 530 and 542 models.

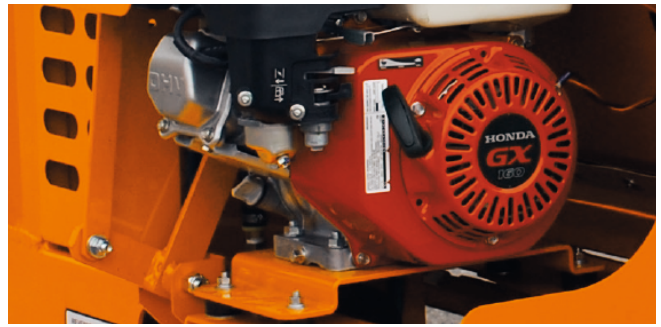

Powerful Honda engine

All models are equipped with a powerful, durable and efficient Honda engine. Its guard is designed to prevent silage or gasoline from settling between the engine block and the muffler. It also protects the operator from burns.

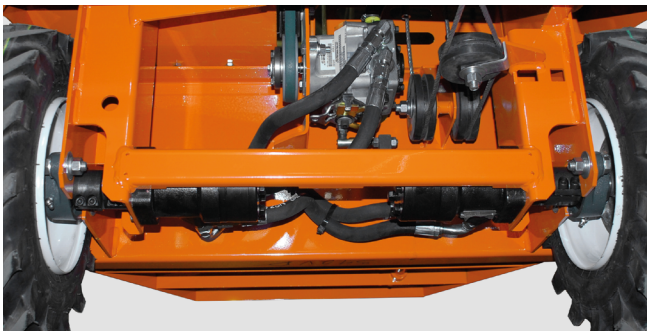

Drive wheels directly mounted on motor-wheels

The drive wheels are mounted directly on motor-wheels with a capacity of 3,250 lb (1500 kg) for more strength and less maintenance.



Tires and wheels

Different models of anti-puncture tires are available. The drive wheels can be fitted with all-terrain, puncture-proof or tractor-type tires.



Access doors

Mounted on hinges, they provide quick access for maintenance.

Oil filter

Protects all hydraulic components.

Floor

The supercart floor is bolted, so it can be easily removed.

Unloading options

SUPERCART VA

Right discharge auger

The VA Supercart is equipped with a 12" (30cm) sturdy discharge auger, located on the right side of the machine, for a fast and uniform unloading of the ration.

The "U" trough is lined with an abrasion resistant polymer liner (UHMW).



SUPERCART CC

Left/right discharge by conveyor

The CC Supercart features a cross conveyor driven by a sturdy reversible gearbox that allows unloading on either side of the cart for more flexibility.

Foot operated, all the components are underneath the cart to eliminate damage from curbs and doorways.

Angled-iron paddle design reduces conveyor speed and extends chain life.



SUPERCART HT

High discharge

Specially designed for elevated mangers, the HT Supercart features an inclined bottom section and twin discharge augers on the right side of the machine, to evenly discharge the ration.

A 16" (40 cm) long slide is supplied with the cart to carry the feed further away if needed. The bottom of the discharge opening is 40" (102 cm) from the floor.





Specifications

Model	Length	Width	Height	Capacity	Weight
530	82" (208 cm)	33" (84 cm)	60" (152 cm)	38 ft ³ (1.1 m ³)	980 lb (445 kg)
542	88" (224 cm)	37" (94 cm)	64" (163 cm)	54 ft ³ (1.5 m ³)	1,080 lb (490 kg)
960	100" (254 cm)	45" (114 cm)	64" (163 cm)	77 ft ³ (2.2 m ³)	1,440 lb (653 kg)
975	116" (295 cm)	45" (114 cm)	64" (163 cm)	96 ft ³ (2.7 m ³)	1,645 lb (748 kg)

Feed cart with front-wheel drive

Hydraucart

The Hydraucart is a feeding cart specially designed for narrow spaces, thanks to its wheel layout.

Available only in the VA model, the right-hand unloading auger ensures fast, uniform ration distribution!

Features

Honda 5.5 Hp. motor
(models 532 and 544)

Honda 9 Hp. motor (model 962)

Hydraulic oil filtration system

Direct drive via 2 hydraulic motors

TMR batteries as standard
(model 962 only)

Bolted floor

Driver seat

Benefits

- ✓ Easy handling.
- ✓ Simple, efficient, low-maintenance mechanics.
- ✓ Ergonomic layout of control levers and pedals, making work easier for the operator.
- ✓ High-performance hydrostatic pump.

The easy-to-handle Hydraucart is ideal for small farms.

Options

- // Electric starter with 12VDC battery (model 962 only)
- // TMR beaters (models 532 and 544)
- // Flat-free traction tires
- // Flat-free steering tires






Spiral beaters

The spiral beater regulates the flow of feed and eliminates risks of bridging, no matter the condition of silage.



Drive wheels

The drive wheels are directly driven by two hydraulic motors. These are powered by a powerful hydrostatic pump, eliminating the need for a differential or high-maintenance transmission.

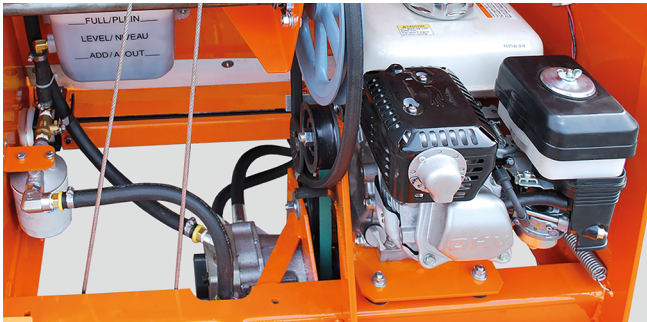

Proven drive system

This drive technique and the use of top-quality mechanical components make the Hydraucart a simple yet highly effective machine!




Rotation axes

Strategically placed near the center of the tank, the wheel arrangement ensures a minimum turning radius for narrow aisles!

Specifications

Model	Length	Width	Height	Capacity	Weight
532	87" (221 cm)	35" (89 cm)	64" (163 cm)	45 ft ³ (1.3 m ³)	860 lb (390 kg)
544	93" (236 cm)	39" (99 cm)	64" (163 cm)	55 ft ³ (1.6 m ³)	944 lb (428 kg)
962	108" (274 cm)	44" (112 cm)	64" (163 cm)	70 ft ³ (2 m ³)	1,300 lb (590 kg)

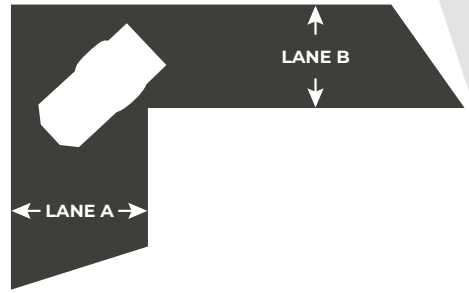

Minimum required width of aisles to allow the **Supercart** turn

530		542		960		975	
A	B	A	B	A	B	A	B
48" (122 cm)	64" (163 cm)	54" (137 cm)	74" (188 cm)	56" (142 cm)	86" (218 cm)	62" (158 cm)	106" (269 cm)
50" (127 cm)	62" (158 cm)	56" (142 cm)	72" (183 cm)	58" (147 cm)	84" (213 cm)	64" (163 cm)	104" (264 cm)
52" (132 cm)	60" (152 cm)	58" (147 cm)	70" (178 cm)	60" (152 cm)	82" (208 cm)	66" (168 cm)	102" (259 cm)
54" (137 cm)	58" (147 cm)	60" (152 cm)	68" (173 cm)	62" (158 cm)	80" (203 cm)	68" (173 cm)	100" (254 cm)
56" (142 cm)	56" (142 cm)	62" (158 cm)	66" (168 cm)	64" (163 cm)	78" (198 cm)	70" (178 cm)	98" (249 cm)

Minimum required width of aisles to allow the **Hydraucart** turn

532		544		962	
A	B	A	B	A	B
54" (137 cm)	62" (158 cm)	60" (152 cm)	62" (158 cm)	72" (183 cm)	64" (163 cm)
56" (142 cm)	60" (152 cm)	62" (158 cm)	58" (147 cm)	74" (188 cm)	62" (158 cm)
58" (147 cm)	56" (142 cm)	64" (163 cm)	56" (142 cm)	76" (193 cm)	60" (152 cm)
60" (152 cm)	52" (132 cm)	66" (168 cm)	54" (137 cm)	78" (198 cm)	58" (147 cm)
62" (158 cm)	50" (127 cm)	68" (173 cm)	52" (132 cm)	80" (203 cm)	56" (142 cm)

Specifications, descriptions and illustrative material in this literature are as accurate as known at the time of publication, but are subject to change without prior notice. Illustrations may include optional equipment and accessories, and may not include all standard equipment.



CANADA
Quebec

UNITED STATES
Wisconsin
California

info@valmetal.com