

Combox

Silage reserve

Benefits

Versatile and suitable for all feed types.

Simple and solid construction with a large loading capacity.

 Sustainable materials for minimum maintenance costs.

Low energy consumption.

The best solution for feeding your herd from bunker silos or ag bags.

Features

Wall panels and floor are made of heavy gauge stainless steel to resist abrasion and corrosion.

Independent apron drive for better control of unloading.

Heavy-duty logging chains rated at 11,300 lb (5140 kg).

Paddles and chains move on UHMW slides to reduce friction.

Motor requirement: 5 HP (4 kW) / beater 3 HP (2 kW)/ conveyor






valmetal.com

A great asset in your automated feeding system!

Be precise and efficient in your feed preparation by adding one or more silage reserves into your automated feeding system.

An automated control panel comes with each Combox. This panel is in charge of stopping the conveyor when the motor of the 3 beaters works beyond the required capacity, in order to avoid mechanical breakage.

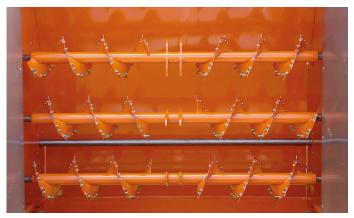

Beaters

3 heavy duty beaters are driven independently with a 5 hp (3.8 kW) motor. Sharp hardened knives can chop through the toughest material*, like frozen silage.

*Not recommended for silage blocks.



Logging chains

Heavy duty logging chains ride on UHMW slides and are covered to prevent material from getting in contact with the chains.



Flow regulation

Apron speed is controlled by a variable frequency drive (VFD) which regulates the unloading flow, ensuring precise quantity delivery.

13C72-0258 (11/2022)

Specifications	Rear loading height	60" (152 cm)	60" (152 cm)	60'' (152 cm)	60" (152 cm)
4 models from 300 to 900 ft³ (10 to 26 m³) capacity.	Width at the top	109" (275 cm)	109'' (275 cm)	109" (275 cm)	109" (275 cm)
	Width at the bottom	76" (193 cm)	76'' (193 cm)	76" (193 cm)	76" (193 cm)
	Total height (without legs)	92" (233 cm)	92" (233 cm)	92" (233 cm)	92" (233 cm)
	Total height (with legs)	127'' (321 cm)	127'' (321 cm)	127'' (321 cm)	127" (321 cm)
	Unloading height (with legs)	36" (91 cm)	36" (91 cm)	36" (91 cm)	36" (91 cm)
	Length	164'' (415 cm)	210" (533 cm)	260 (658 cm)	306" (777 cm)

Specifications, descriptions and illustrative material in this literature are as accurate as known at the time of publication, but are subject to change without prior notice. Illustrations may include optional equipment and accessories, and may not include all standard equipment.