

Regulator conveyor

Best conveyor for uniform material flow

VALMETAL

Benefits

- ✓ Easy to maintain and designed with durable materials requiring minimal upkeep.
- ✓ Flow regulation of materials thanks to the vertical back-and-forth movement of the chain.
- ✓ High versatility with stainless steel sections available in 2,5' (0,8 m), 5' (1,5 m) ou 10' (3 m).

Interior view of the conveyor shown without safety covers.



Options & accessories

// Loading hopper

Features

Width: 24" (61 cm)

Direct drive gearbox, 70 ou 80 series

Double chain 667X with a speed of 134'/min (41 m/min)

Top loading and bottom convey discharge in stainless steel

UHMW slides

Stainless steel frame

Decline/incline sections up to 45°

A sturdy construction


The entire conveyor structure is made of stainless steel to resist corrosion and abrasion.





A consistent Flow at All Times

- Best choice for creating uniform flow out from irregular inputs such as a vertical mixer.
- Helps prevent overloading of downstream conveyors.
- Ensures smooth operation and extends equipment lifespan.

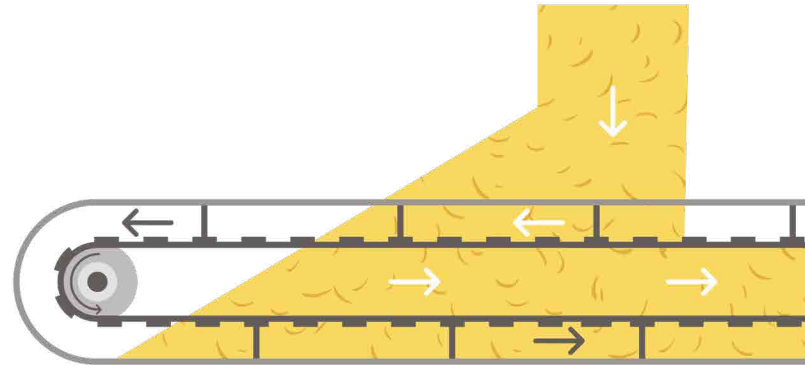

Specifications

Conveyor length	Recommended Motor Power
Up to 20' (6,1 m)	1 1/2 HP
From 20' (6,1 m) to 30' (9,1 m)	2 HP
From 30' (9,1 m) to 45' (13,7 m)	3 HP

70 Series: Compatible with 2HP motor maximum

80 Series: Compatible with 3HP motor only

For any specific requirements, please contact your Valmetal distributor.

Specifications, descriptions and illustrative material in this literature are as accurate as known at the time of publication, but are subject to change without prior notice. Illustrations may include optional equipment and accessories, and may not include all standard equipment.

13C72-0020 (06/2026)

valmetal.com